

# INDUSTRIAL SERIES

## ■ PRODUCT



**EFW-65M EFW-75M**

1 stainless steel circular pipe  
and 2 nozzles






**EFS-65M EFS-75M**

2 stainless steel circular pipes  
and 6 nozzles



**EFS-65M EFS-75M**

1 stainless steel circular pipe  
and 4 nozzles

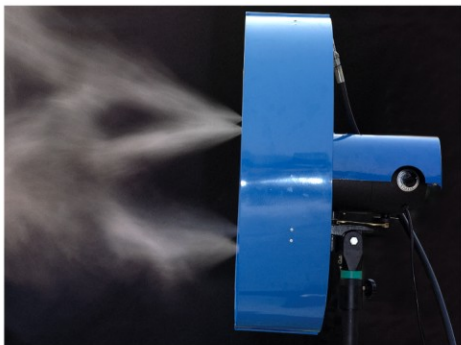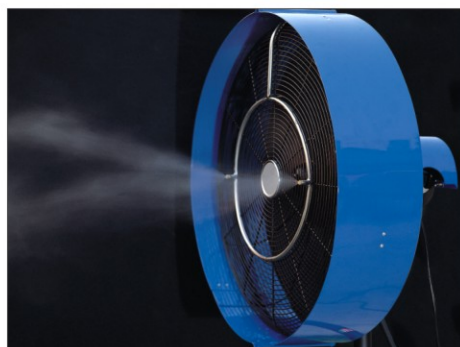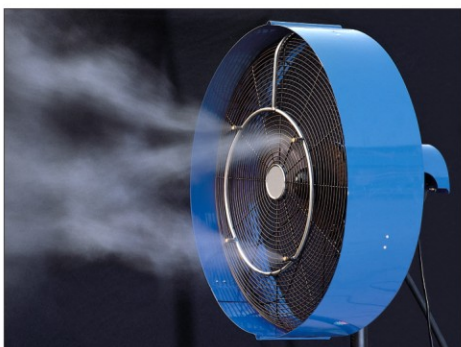

## DESCRIPTION

- 650mm, 750mm wall mount or stand fans available
- 3-speed control
- 110° degrees oscillating
- Adjustable fan height
- 30° tilting fan head
- Safety fan grilles
- Safety thermal cut-out protection

### ELECTRIC PUMP(optional)

- recommended to use with mist fan to give the best mist performance
- a pump can carry 32 nozzles




### MOTOR

- splash proof shaded cover
- heavy duty & high performance
- squirrel cage inducting type with capacitor run & start type capacitor
- built-in thermal fuse



### ANTI-RUST

- high graded aluminum & epoxy paint coating



HIGH PRESSURE FLEXIBLE HOSE



### NOZZLES

- optional filter type nozzles
- 2,4,6 nozzles setting available
- easy -to-clean & durable
- hi-graded alloy for high pressure endurance
- super fine hole for best mist performance



### STAINLESS STEEL CIRCULAR PIPE

- double or single pipe for selection



SPACE-SAVING DETACHABLE/ FOLDABLE DRUM



FIG.1

- drum before installation



FIG.2

- drum after installation with clips locked