


# Dimmer Switch



## Features



- Controlled by micro-processor
- Adopts proprietary adaptive dimming technology to eliminate flickering and achieve maximum dimming range
- Leading edge dimming
- Adaptive to accommodate wider varieties of LED lights
- 2-in-1 push button and rotary knob for easy on/off and dimming operation
- Memory function – LED light is always on as per last setting
- Easy-to-install design to fit into standard wall box
- ABS-V0 flame retardant material

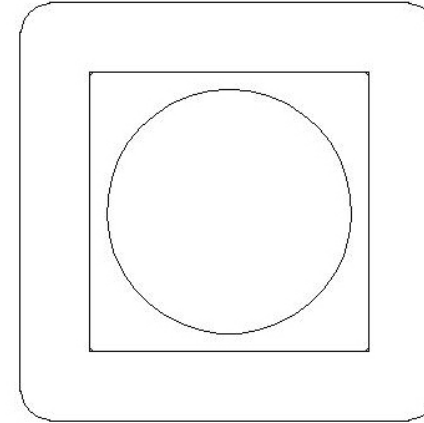

ISH-D205

## Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliances	150W
Dimming range	< 3% to 100%*
Operation environment	20-90% RH, -20°C to 40°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Wall mount unit dimension / weight	86 x 86 x 43 mm / 81g
Product weight	72g

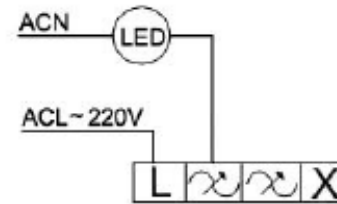

\* For most dimmable LED lights. The dimming range varies from LED light to LED light or from manufacturer to manufacturer. Dimmable LED lights usually will not achieve as low a light level as incandescent or halogen sources.

## IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.  
Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- **Specification is subject to change without prior notice due to continuous product improvement**