

Smartphone Timer Switch





Features

- 3 way control up to 3 different circuits
- Adjustable delay-timer
- Controlled by push buttons or Smartphone.
- Easy-to-install design to fit into standard wall box
- LCD display
- Applicable for AC motors and lights
- ABS-V0 flame retardant material
- Work with all kinds of loads
- Wi-Fi working distance up to 30m

Specification & Wiring Diagram

Voltage/Frequency	220-240V~50/60Hz
Input power of applied appliance (max)	3 x 1000W
Load Type	All types
Operation environment	20-90% RH, -20°C to 40°C
Wall box dimension	75 x 75 x 50 mm
Mounting hole spacing	60mm
Wall mount unit dimension	86 x 86 x 50.5 mm / 139g

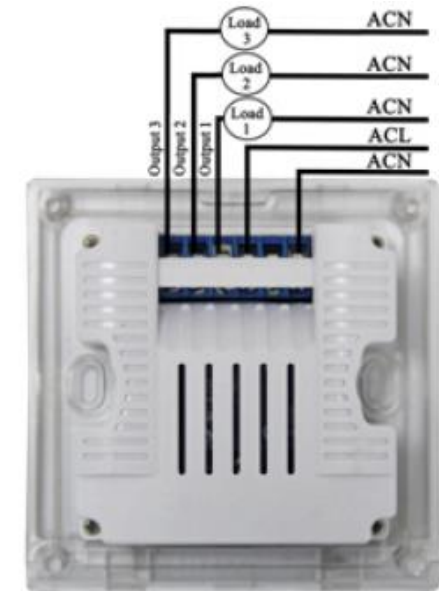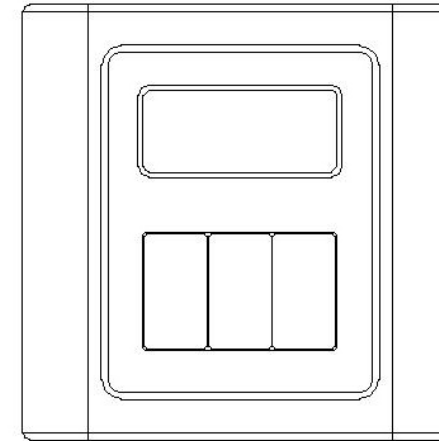

ISH-107

IMS International Ltd.

Unit 1, 39/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, N.T., Hong Kong.

Tel : +(852) 2881 8011 Fax : +(852) 2894 8682 Web : www.imasu.com, Email : sales@imasu.com

- *Specification is subject to change without prior notice due to continuous product improvement*